



16:10

16:9

4:3

1:1



Matte White
Viewing Angle: 120°
Gain: 1.0



High Contrast
Viewing Angle: 100°
Gain: 1.1



Datalux
Viewing Angle: 70°
Gain: 1.5

Descender Electrol

- Attractive and durable built-in solution. Integrating a ceiling recessed projection screen was never this easy.
- Closure formed by the slat bar ensures that ceiling mounting is inconspicuous.
- Easy Serviceability System: once installed, the motor and screen surface remain accessible making adjustments and carrying out maintenance possible. The bottom panel and case remain connected to each other.
- Easy to build into existing non-modular ceilings.
- The case and the projection screen surface can be made to exactly the right size and the visible components are available in any colour for optimal integration into any interior.
- Limit switches are factory set guaranteeing a long life span. The Descender Electrol is supplied with a wall switch.
- Prevent any damage by using the Pre-Installation Box to reserve space for the Descender Electrol.

Available dimensions


Minimum width: 180 cm |
Maximum width: | 340 cm

Other options

- Radio frequency: Includes built-in radio frequency receiver, making it possible to operate the screen using the supplied remote control.
- Without borders

Accessories

- Easy Install Plug and Play Relay Box with Potential-Free Contacts
- Easy Install Plug and Play RF Remote Control
- More on page 58

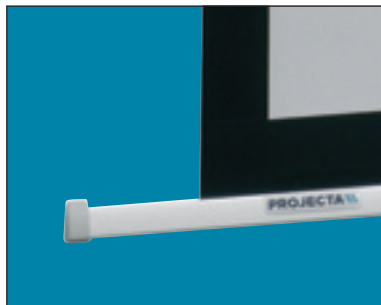


Triangular slat bar retracts into the case



Perfect integration into the ceiling



Easy Serviceability



Customise this projection screen to perfectly fit your installation

NOT SUITABLE FOR
ULTRA SHORT THROW
PROJECTION





Dimensions and
product codes on

86


2-Step installation

Screen Case / Screen Surface Assembly


- Order the screen case separate from the screen surface. Install the Screen Case during the rough-in stages and the Screen Surface Assembly at a later stage preventing any damage.
- The Screen Surface Assembly includes the bottom panel of the screen, motor and screen surface.
- The steel cables of the Projecta Easy Serviceability System easily connect the Screen Surface Assembly to the case ensuring a quick installation.
- Order the case first and decide the aspect ratio and screen surface at a later stage ensuring optimal flexibility.

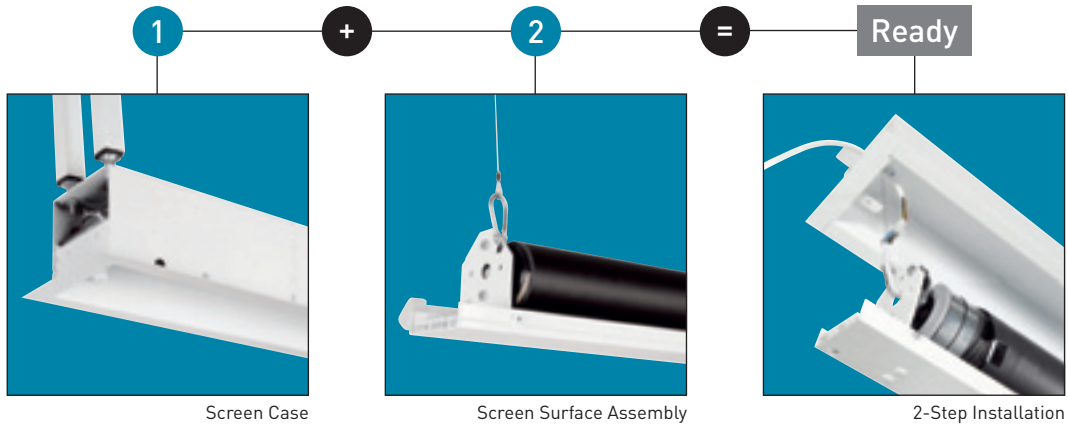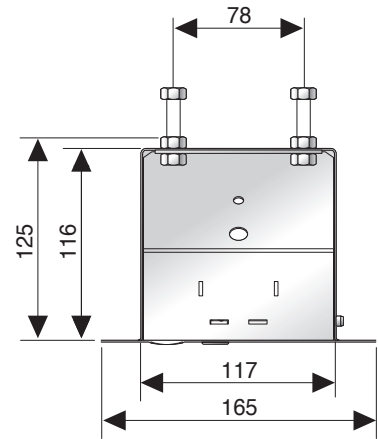


Pre-Installation Box




- Install the Pre-Installation Box in a fixed ceiling to reserve space for the Descender Electrol.
- Prevent damage to the projection screen surface and the screen casing. Install the Pre-Installation Box in the ceiling during the rough-in stages of construction and place the projection screen during the finishing stage.
- Mount the Pre-Installation Box using flexible mounting points at the top of the box or from the sides.
- Once installed the flange on the case of the Descender Electrol will completely cover the Pre-Installation Box.



Easy Installation during the rough stages



Edges will be invisible after installation



Install the projection screen at a later stage

Dimensions and product codes on **82**